


Zyxel modemmi iserfigissavat nittartakkami una allallugu [192.168.1.1](http://192.168.1.1)



Siullerpaamik isileruit inuup nalaani allassavat: admin

Kode: 1234

Login

Taava kodemik nutaamik allannissannik peqquneqassaait.

Kode nutaaq allassavat: TelePost123


New Password:

Retype to Confirm:

Apply


Computeri atorlugu pulareeruit Configuration tuussavat:

**ZYXEL**

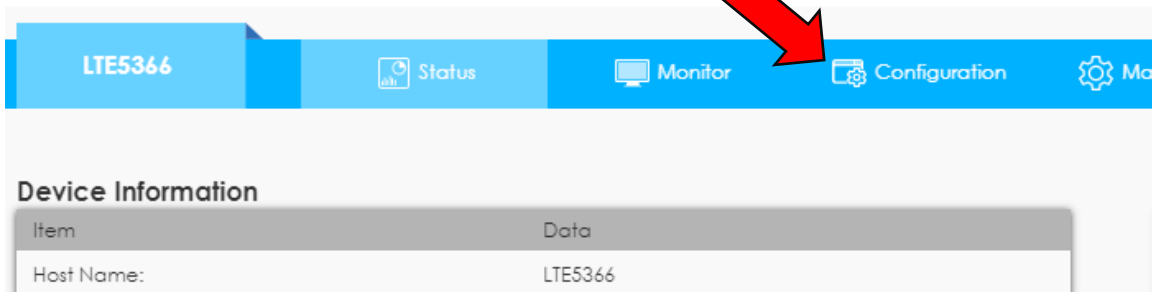


Mobiili atorlugu pulareeruit Configuration ersersinniarlugu toornerit qaqqortut pingasut tuussavatit:


**ZYXEL**

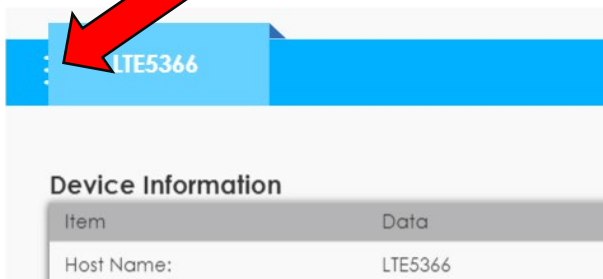

Saamerlermi qinigassani Management tuussavat:

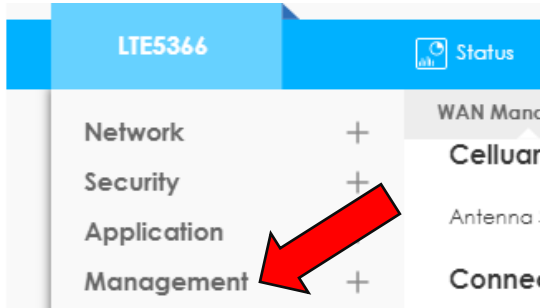

Taava TR069 tuussavat:

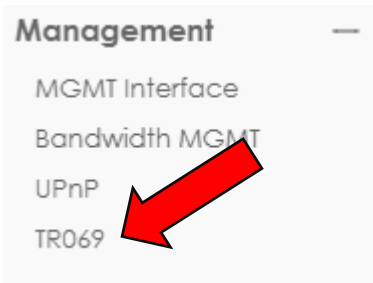

Ammalortut marluk Enable nalaaniittut tuukkit:



Imatut isikkoqassaaq:



Apply tooruk:



TR069 ikippat maannalu nittartagaq matusinnaavat.