

Zyxel bygd TR069 KAL

View in Help Scout

(<https://secure.helpscout.net/docs/5f1af58904286306f8075bba/article/5f36b87d2c7d3a352e90d7ac>)

+1. Modem aqqissuisarfia iserfigiuk

Uunga iserit: 192.168.1.1

Isertaatitut allassuatit

(brugernavn): admin


(adgangskode): 1234 Taava login tuussuat.

2. Kode allangortiguk

Atuisup kode pinngittoorani allangortittussaammangu, allangortissooq.

Minnerpaamik naqinnerit arfineq pingasut imarissuai, naqinnerit angisuut marluk, kisitsiseqassallunilu, assersuut: TelePost123

Zyxel-imut iseraanni taava Configuration tuussooq:

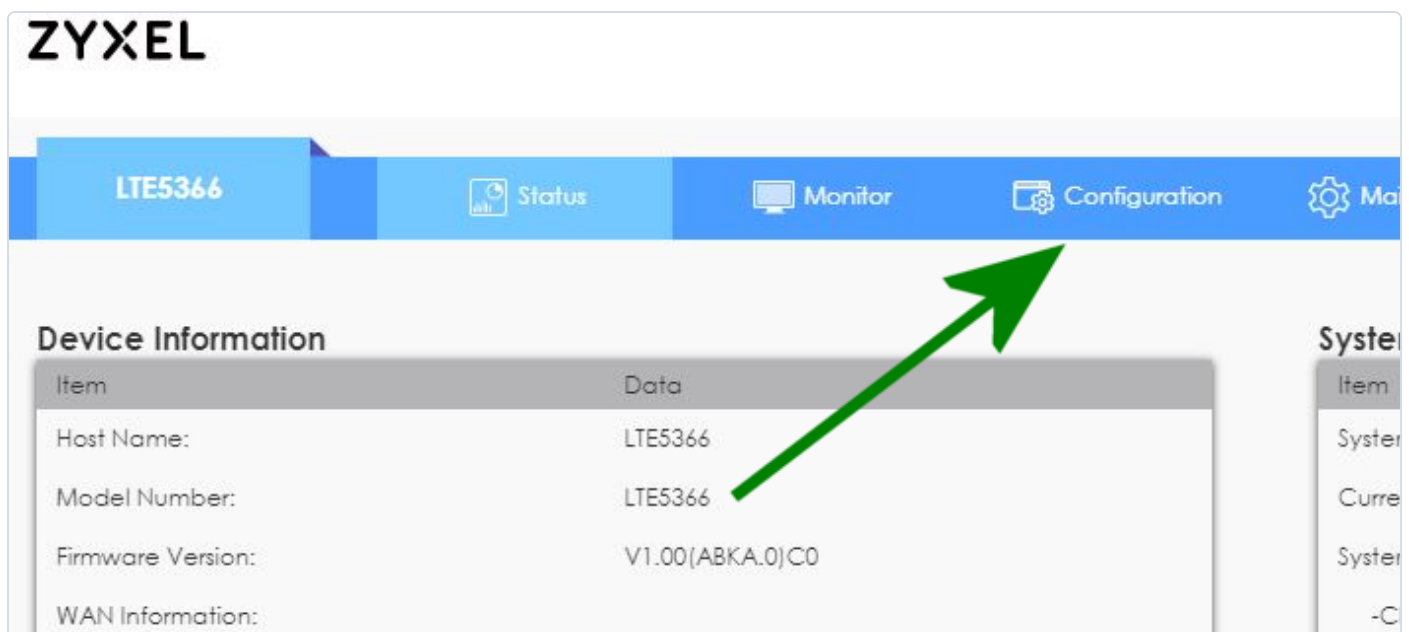


The screenshot shows the Zyxel web interface. At the top left is the 'ZYXEL' logo. Below it is a navigation bar with several tabs: 'LTE5366', 'Status', 'Monitor', 'Configuration', and 'Ma'. A green arrow points to the 'Configuration' tab. Below the navigation bar is a 'Device Information' section with a table:

Item	Data
Host Name:	LTE5366
Model Number:	LTE5366
Firmware Version:	V1.00(ABKA.0)C0
WAN Information:	


On the right side of the interface, there is a 'System' section with a table:

Item
System
Curre
System
-C


Taassuma kingunerani Management toorneqassooq:

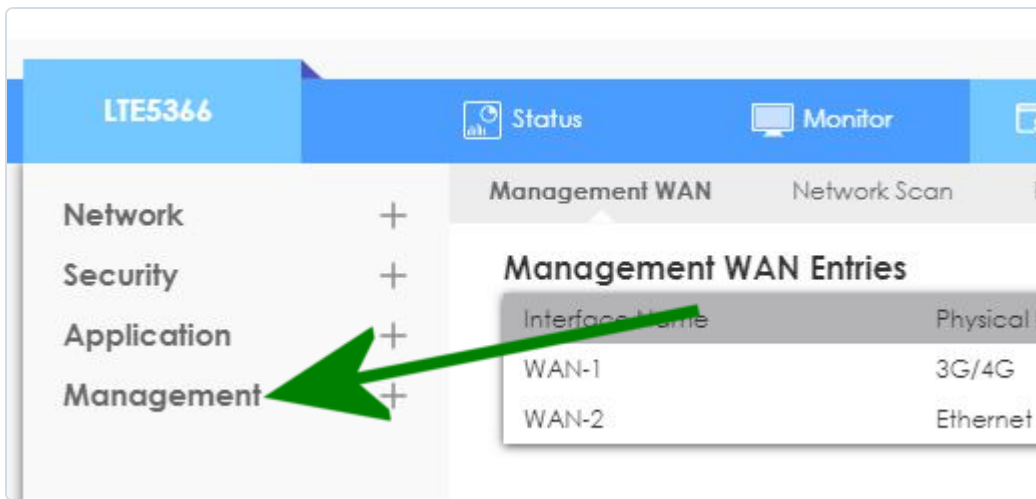


Taassumalu kingunerani TR069 toorneqassooq aamma:

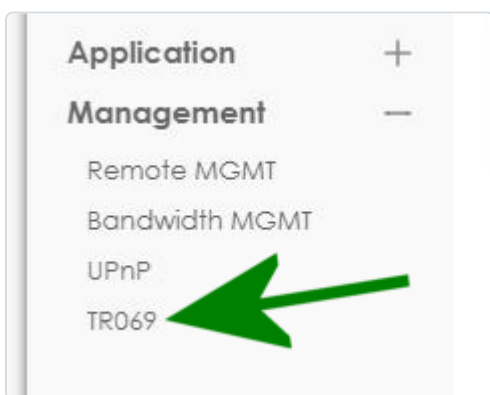

Ukua marluk TR069 aamma Inform Enable-mut ilissapput:

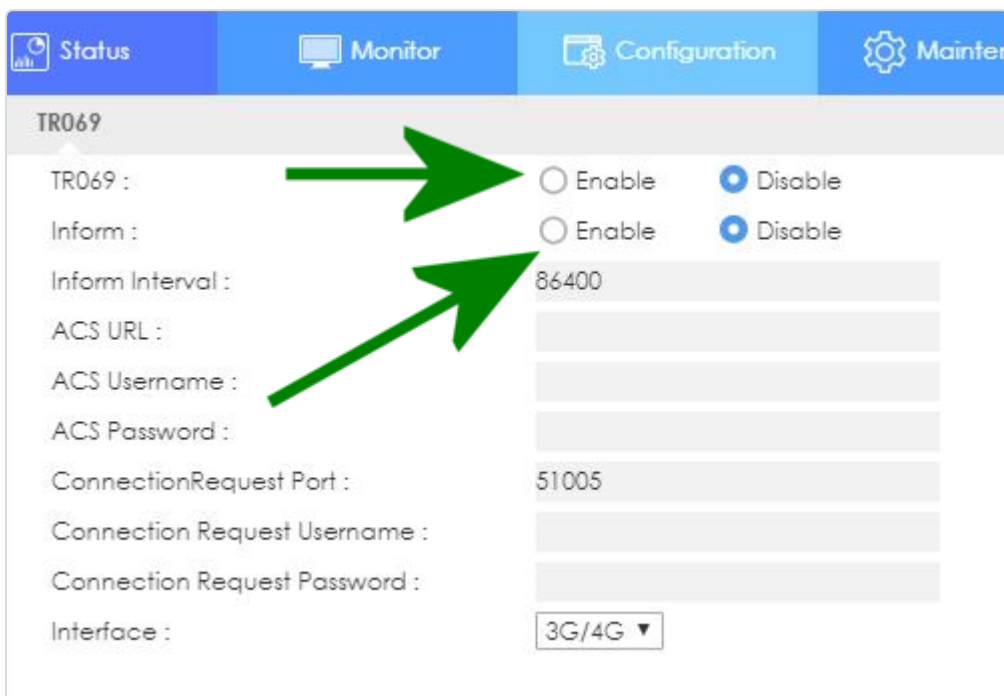

Imatullu isikkoqassalluni:

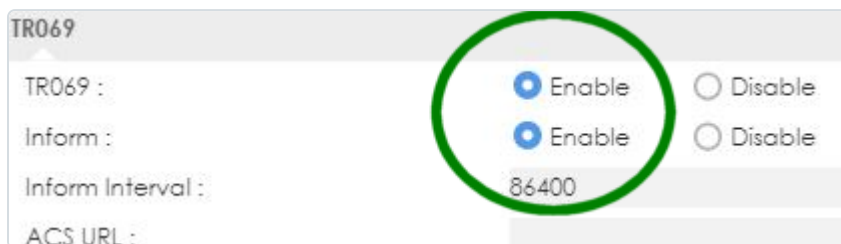

TR069

TR069 : Enable Disable

Inform : Enable Disable

Inform Interval : 86400

ACS URL :

Suliap naammassinerani Apply toorneqassooq:



RELATEREDE ARTIKLER

Sidst opdateret den Februar 16, 2023

[Zyxel bygd Quickguide \(/article/192-zyxel-mobile-first-modem\)](/article/192-zyxel-mobile-first-modem)

[Zyxel bygd TR069 \(/article/193-zyxel-tr069\)](/article/193-zyxel-tr069)

[Zyxel Bygd Wifi ændring \(/article/190-zyxel-bygd-wifi\)](/article/190-zyxel-bygd-wifi)

[Zyxel Bygd Wifi KAL \(/article/191-zyxel-bygd-wifi-kal\)](/article/191-zyxel-bygd-wifi-kal)